

WIRELESS VIDEO TRANSMISSION SOLUTION

Shenzhen Micagent Technology Co., Ltd

Website: www.micagent.com

WhatsApp: +86 18682245879

Email: wzhizhuo20160301@gmail.com

Address: 3/F, Block A, Nanke Chuangyuan Valley Building, Dalang Street, Longhua District, Shenzhen, Guangdong, China

CATALOG

Overview 1

1. Series for Home

MA083H/P	3
MA009/WL009Pro	5
MA081	7
MA095	9

2. Series for Live Streaming

MA900S/WL900Pro	11
MA082/WL082U	13
MA085U	15
MA085P	17
MA097	19
MA097Pro	21

3. Series for Office

MA094	23
MA093	25
MA084	27
MA090	29

4. Series for Professional

MA080	31
MA096	33
MA098/WL098 Pro	35

5. Extended product

MA050	37
MA100	39
MA201,MA203	41
Screw,Battery,Battery Charger	42

WIDE APPLICATIONS



OVERVIEW

Transmission can pass through the wall.

4K UHD



MA098 Pro

4K+HDMI+SDI+1000FT/305Meters+H.265



MA098

4K+SDI+HDMI



MA096

4K+UVC+Battery slot



MA097 Pro

4K+1312FT/400M+Dual outputs
+Battery Slot+ Audio Port



MA097

4K+656FT/200M+Dual outputs+Battery Slot



MA095

4K+490FT/150M+Dual outputs

Transmission can pass through the wall.

1080P HD



MA083H

1080P+RX:7"LCD +IR+1312FT/400Meters



MA083P

1080P+RX:7"LCD +IR+Battery Slot
+1312FT/400Meters



MA082

1080P+1312FT/400Meters
+IR+Battery Slot



MA08U

1080P+1312FT/400Meters
+IR+Battery Slot+UVC



MA085U

1080P+Camera+1312FT/400meters
+Battery Slot+UVC



MA085P

1080P+Camera+1312FT/400meters
+Battery Slot+RX:7"LCD



MA081

1080P+1312FT/400Meters+IR



MA009

1080P+820FT/250Meters+IR

Mini



MA094

1080P+330FT/100Meters+1 to 1



MA093

1080P+196FT/60Meters+Low delay



MA084

1080P+656FT/200Meters+1TX to 2RXs



MA090

1080P+590FT/180Meters+MINI



MA050

Selfie display screen for Mobile phone rear camera
Wireless take photo+Mirroring+330FT/100M



MA080

1080P+1100FT/338Meters



MA083H/P

Portable 7" LCD Receiver

FEATURES

- Crystal-Clear HD:
1080P resolution with low latency 0.05s for smooth playback.
- Long-Range Stability:
Uninterrupted transmission up to 400 meters (1,312 feet) in open spaces.
- Multi-Device Sync:
Connect one transmitter to five receivers for versatile setups.
- Infrared remote control:
Supports infrared extension, allowing the receiving end to remotely control the signal source.
- Portable Design:
Supports NP-F series battery and 7" LCD screen for on-the-go use.
- Broad Compatibility:
Works with HDMI-enabled devices (cameras, laptops, gaming consoles, TVs, etc).



SPECIFICATION

Wireless distance	≥400Meters
Working frequency	5GHz
Video compress format	H.265
Latency	≤0.05S
TX HDMI IN	1920*1080P@60Hz backward compatible
TX LOOPOUT	1920*1080P@60Hz backward compatible
RX HDMI OUT	1920*1080P@60Hz
RX Screen	7 inch LCD Screen, RGB, Resolution: 1024*600
HDMI Protocol	HDMI1.3, HDCP1.4
Support transmission way	1TX to 1RX 1TX to 2RXs 1TX to 3RXs 1TX to 4RXs 1TX to 5RXs
IR Interface	3.5mm headset interface, Frequency range : 30KHz~60KHz
Antenna	WL082TX use WL-208 2PC antenna RX side use WL-208 4PCS antenna
Audio interface	3.5mm headset interface, Support dual audio channel
RX button	1*Reset 1*SYSTEM POWER 1*LCD Power 1*brightness+ 1*brightness- 1*volume+ 1*volume-
RX loudspeaker	1*1.5W
TX Interface	1*HDMI IN 1*LOOPOUT 1*IR 1*Type-c (Power interface) 1*3.5mm headset interface 1*RESET button
RX Interface	1*HDMI OUT 1*IR 1*Type-c (Power interface) 1*3.5mm headset interface 1*RESET button

BATTERY SPEC

NPF970 6600Mah	TX: 25h	RX: 13h
NPF750 4400Mah	TX: 10.5h	RX: 7.5h
NPF550 2600Mah	TX: 7h	RX: 4h

CERTIFICATE



HOME





MA009/MA009Pro

1080P Stable Transmission

FEATURES

- LOS Range up to 820FT/250Meters
- 2.4G/5G Dual-band Transmission.
- Low latency≤0.06S.
- Plug and play, no App.
- Up to 1TX to 4RXs.
- Local loop out
- Supports 1080P@60Hz HD output resolution and backward compatible.
- IR extension remote control.
- Supports hot/cold shoe expansion
- USB-C DC 5V/2A power supply or portable charge.
- Transmitter compatible :TV set-top box, laptop, digital camera, camcorder, and HDMI deviceslike PS4/5 game console.
- Receiver compatible : TV, monitor, projector and more.



SPECIFICATION

Transmission Range	820FT/250Meters
Frequency	2.4GHz/5GHz
Video Coding	H.264
Video/Audio Latency	≤0.06S
HDMI IN	1920x1080P@60Hz backward
HDMI OUT	1920x1080P@60Hz
LOOP OUT	1920x1080P@60Hz
Power Supply Options	Type-C/DC 5V/2A
HDMI Protocol	HDMI 1.3, HDCP 1.4
Code	20Mbps
Material	PC+ABS+Metal
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera

PACKING

Size(L×W×H)	120×69×24mm
Package Size	203x153x58mm
Package Weight	630g
Accessories	Transmitter x1 Receiver x1 Antenna x4 Charge Cable x2 Power Adapter x2 IR Extension Cable x2 User Manual x1

TRANSMISSION RANGE WITH MULTI-RECEIVER

	WL009	WL009 PRO
1TX to 1RX	820FT/250Meters	990FT/300Meters
1TX to 2RXs	754FT/230Meters	920FT/280Meters
1TX to 3RXs	688FT/210Meters	853FT/260Meters
1TX to 4RXs	623FT/190Meters	787FT/240Meters

CERTIFICATE



HOME





MA095

Compact and 1080P Clarity & Stable Transmission

FEATURES

- LOS Range up to 1312FT/400Meters
- 2.4G/5G Dual-band Transmission.
- Low latency≤0.05S.
- Plug and play, no App.
- Up to 1TX to 5RXs.
- IR remote control.
- Dual HDMI outputs on RX
- Supports input and output resolution at 1080P@60Hz and backward compatible.
- Supports hot/cold shoe expansion.
- USB-C DC 5V/2A power supply or portable charge.
- Transmitter compatible : TV set-top box, laptop, digital camera, camcorder, and HDMI devices.
- Receiver compatible : TV, monitor, projector and more.



SPECIFICATION

Transmission Range	1312FT/400Meters
Frequency	2.4GHz/5GHz
Video Coding	H.265
Video/Audio Latency	≤0.05S
HDMI IN	1920x1080P@60Hz backward
HDMI OUT	1920x1080P@60Hz
LOOP-OUT	1920x1080P@60Hz
IR Range	30KHz~60KHz
Power Supply Options	Type-C/DC 5V/2A
HDMI Protocol	HDMI 1.3b; HDCP 1.4
Code	20Mbps
Material	PC+ABS+Metal
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera

PACKING

Size(L×W×H)	116x63.5x22.5mm
Package Size	205x155x60mm
Package Weight	620g
Accessories	Transmitter x1 Receiver x1 Antenna x4 Charge Cable x2 Power Adapter x2 User Manual x1

TRANSMISSION RANGE WITH MULTI-RECEIVER

	WL081
1TX to 1RX	1312FT/400Meters
1TX to 2RXs	656FT/200Meters
1TX to 3RXs	490FT/150Meters
1TX to 4RXs	390FT/120Meters
1TX to 5RXs	260FT/80Meters

CERTIFICATE



HOME





MA095

4K Ultra HD Visual Feast

FEATURES

- LOS Range up to 656FT/200Meters
- 2.4G/5G Dual-band Transmission.
- Low latency≤0.1S.
- Plug and play, no App.
- Up to 1TX to 4RXs.
- Local loop out.
- Dual HDMI outputs on RX
- Supports input and output resolution at 4K@30Hz and backward compatible.
- Supports hot/cold shoe expansion.
- USB-C DC 5V/2A power supply or portable charge.
- Transmitter compatible :TV set-top box, laptop, digital camera, camcorder, and HDMI devices like PS4/5 game console.
- Receiver compatible : TV, monitor, projector and more.



SPECIFICATION

Transmission Range	656FT/200Meters
Frequency	2.4GHz/5GHz
Video Coding	H.265
Video/Audio Latency	≤0.1S
HDMI IN	3840x2160P@30Hz backward
HDMI OUT	3840x2160P@30Hz/1920x1080P@60Hz
LOOP-OUT	3840x2160P@30Hz/1920x1080P@60Hz
Power Supply Options	Type-C/DC 5V/2A
HDMI Protocol	HDMI 1.4b; HDCP 1.4
Code	60Mbps
Material	PC+ABS+Metal
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera

PACKING

Size(L×W×H)	117×71×23mm
Package Size	198x155x58mm
Package Weight	660g
Accessories	Transmitter x1 Receiver x1 Antenna x4 Charge Cable x2 Power Adapter x2 User Manualx1

TRANSMISSION RANGE WITH MULTI-RECEIVER

	WL095
1TX to 1RX	656FT/200Meters
1TX to 2RXs	295FT/90Meters
1TX to 3RXs	147FT/45Meters
1TX to 4RXs	65FT/20Meters

CERTIFICATE



HOME





MA900S/900S Pro

1080P Transmission For Outdoor

FEATURES

- LOS Range up to 820FT/250Meters
- Support installed NP-F(970/750/550) series battery power supply
- 2.4G/5G Dual-band Transmission.
- Low latency≤0.06S.
- Plug and play, no App.
- Up to 1TX to 4RXs.
- Local loop out
- Supports 1080P@60Hz HD output resolution and backward compatible.
- IR extension remote control.
- Supports hot/cold shoe expansion
- USB-C DC 5V/2A power supply or portable charge.
- Transmitter compatible :TV set-top box, laptop, digital camera, camcorder, and HDMI devices like PS4/5 game console.
- Receiver compatible : TV, monitor, projector and more.



SPECIFICATION

Transmission Range	820FT/250Meters
Frequency	2.4GHz/5GHz
Video Coding	H.264
Video/Audio Latency	≤0.06S
HDMI IN	1920x1080P@60Hz backward
HDMI OUT	1920x1080P@60Hz
LOOP OUT	1920x1080P@60Hz
Power Supply Options	Type-C/DC 5V/2A/NP-F Battery
HDMI Protocol	HDMI 1.3; HDCP 1.4
Code	20Mbps
Material	PC+ABS+Metal
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera

PACKING

Size(L×W×H)	120×69.8×29.8mm
Package Size	213x180x89mm
Package Weight	1100g
Accessories	Transmitter x1 Receiver x1 Antenna x4 Charge Cable x2 Power Adapter x2 IR Extension Cable x2 User Manualx1

TRANSMISSION RANGE WITH MULTI-RECEIVER

	WL900S	WL900S PRO
1TX to 1RX	820FT/250Meters	990FT/300Meters
1TX to 2RXs	754FT/230Meters	754FT/280Meters
1TX to 3RXs	688FT/210Meters	688FT/260Meters
1TX to 4RXs	623FT/190Meters	623FT/240Meters


BATTERY SPEC

NPF970 6600Mah	TX: 19h	RX: 25h
NPF750 4400Mah	TX: 12h	RX: 15h
NPF550 2600Mah	TX: 7h	RX: 9h

CERTIFICATE



OUTDOOR
LIVE CHOICE

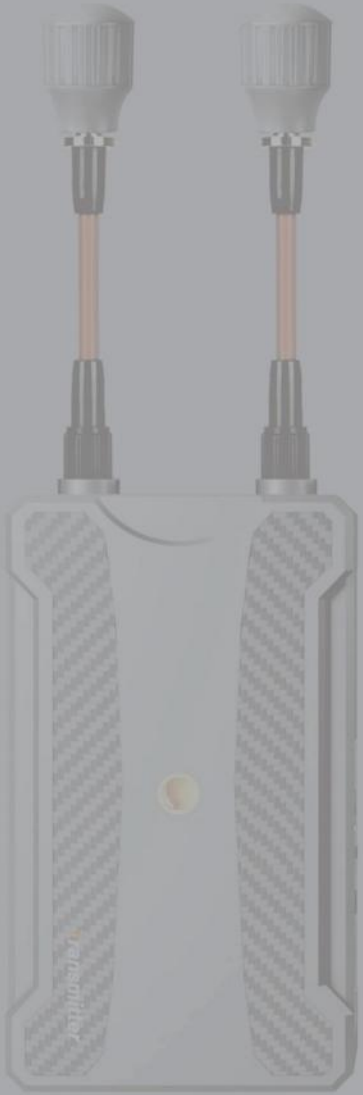



MA082

1080P Transmission Long Range

MA082U

With USB 3.0 Video Capture

FEATURES

- LOS Range up to 1312FT/400Meters.
- Support installed NP-F(970/750/550) series battery power supply
- 2.4G/5G Dual-band Transmission.
- Low latency≤0.05S.
- Plug and play, no App.
- Up to 1TX to 5RXs.
- IR remote control.
- Dual outputs on RX
- Supports input and output resolution at 1080P@60Hz and backward compatible.
- Supports hot/cold shoe expansion
- USB-C DC 5V/2A power supply /NP-F rechargeable battery
- Transmitter compatible :TV set-top box, laptop, digital camera, camcorder, and HDMI devices.
- Receiver compatible : TV, monitor, projector and more.



SPECIFICATION

Transmission Range	1312FT/400Meters
Frequency	2.4GHz/5GHz
Video Coding	H.265
Video/Audio Latency	≤0.05S
HDMI IN	1920x1080P@60Hz backward
HDMI OUT	1920x1080P@60Hz
LOOP-OUT	1920x1080P@60Hz
UVC OUT	1920x1080P@60Hz
Power Supply Options	Type-C/DC 5V/2A/NP-F Battery
HDMI Protocol	HDMI 1.3b, HDCP 1.4
Code	20Mbps
Material	PC+ABS+Metal
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera

PACKING

Size(L×W×H)	116x63.5x22.5mm
Package Size	215x180x90mm
Package Weight	800g
Accessories	Transmitter x1 Receiver x1 Antenna x4 Charge Cable x2 Power Adapter x2 HDMI Cable Mini 30cmx1 HDMI Cable Micro 30cmx1 User Manual x1 USB-C 3.0 Data Cable

TRANSMISSION RANGE WITH MULTI-RECEIVER

	WL082/WL082U
1TX to 1RX	1312FT/400Meters
1TX to 2RXs	820FT/250Meters
1TX to 3RXs	525FT/160Meters
1TX to 4RXs	490FT/150Meters
1TX to 5RXs	330FT/100Meters

BATTERY SPEC

NPF970 6600Mah	TX: 25h	RX: 26h
NPF750 4400Mah	TX: 10.5h	RX: 12.5h
NPF550 2600Mah	TX: 7h	RX: 9.5h

CERTIFICATE



OUTDOOR
LIVE CHOICE





MA085U

Transmitter has a built-in camera input and receiver has UVC output for recording.

FEATURES

- LOS range up to 1312FT/400Meters.
- Up to 1TX to 5RXs.
- Low latency ≤0.05S.
- 5GHz /2.4GHz , plug and play
- Transmitter: 2MP camera with 2" HD LCD display as a signal source.
- Transmitter: camera with MIC supports sound input.
- Receiver: supports UVC output at max 1080P@60Hz for video recording and living brocast.
- Support 1080P@60Hz input/output resolution.
- NP-F(970/750/550) battery compatibility .
- Stable transmission during mobile operation.



SPECIFICATION

Camera Pixels	2 MegaPixel
HDMI Resolution	1920×1080@60Hz
TX camera MIC	Support voice input
Transmission Range	1312FT/400Meters
Frequency	2.4GHz/5GHz
Video Coding	H.265
Video/Audio Latency	≤0.05S
HDMI IN	1920x1080P@60Hz backward
HDMI OUT	1920x1080P@60Hz
UVC OUT	1920x1080P@60Hz
Power Supply Options	Type-C/DC 5V/2A/NP-F Battery
HDMI Protocol	HDMI 1.3b, HDCP 1.4
Code	20Mbps
Material	PC+ABS+Metal
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera

TRANSMISSION RANGE WITH MULTI-RECEIVER

	WL085U
1TX to 1RX	1312FT/400Meters
1TX to 2RXs	820FT/250Meters
1TX to 3RXs	525FT/160Meters
1TX to 4RXs	490FT/150Meters
1TX to 5RXs	330FT/100Meters

CERTIFICATE



OUTDOOR
LIVE CHOICE





MA085P

Transmitter is as signal source with a built-in camera input and receiver is as a lager display with 7” LCD

FEATURES

- LOS range up to 1312FT/400Meters.
- Up to 1TX to 5RXs.
- Low latency ≤0.05S.
- 5GHz /2.4GHz , plug and play
- Transmitter: 2MP camera with 2" HD LCD display as a signal source.
- Transmitter: camera with MIC supports sound input.
- Receiver: portable 7”LCD display for video preview.
- Support 1080P@60Hz input/output resolution.
- NP-F(970/750/550) battery compatibility .
- Stable transmission during mobile operation.



SPECIFICATION

Camera Pixels	2 MegaPixel
HDMI Resolution	1920×1080@60Hz
TX camera MIC	Support voice input
Transmission Range	1312FT/400Meters
Frequency	2.4GHz/5GHz
Video Coding	H.265
Video/Audio Latency	≤0.05S
HDMI IN	1920x1080P@60Hz backward
HDMI OUT	1920x1080P@60Hz
Power Supply Options	Type-C/DC 5V/2A/NP-F Battery
HDMI Protocol	HDMI1.3, HDCP1.4
Code	20Mbps
Material	PC+ABS+Metal
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera
IR Interface	3.5mm headset interface, Frequency range : 30KHz~60KHz
Audio interface	3.5mm headset interface, Support dual audio channel
RX button	1*Reset 1*SYSTEM POWER 1*LCD Power 1*brightness+ 1*brightness- 1*volume+ 1*volume-
RX loudspeaker	1*1.5W
RX Interface	1*HDMI OUT 1*IR 1*Type-c (Power interface) 1*3.5mm headset interface 1*RESET button

TRANSMISSION RANGE WITH MULTI-RECEIVER

	WL085P
1TX to 1RX	1312FT/400Meters
1TX to 2RXs	820FT/250Meters
1TX to 3RXs	525FT/160Meters
1TX to 4RXs	490FT/150Meters
1TX to 5RXs	330FT/100Meters

CERTIFICATE



OUTDOOR
LIVE CHOICE





MA095

4K Transmission ,Dual HDMI Outputs

FEATURES

- Wireless distance: 656FT/200Meters free barrier.
- Material: ABS+PC+Metal
- 2.4G/5G Dual-band Transmission.
- Low latency≤0.1S.
- Plug and play, no App.
- 1TX support max 4RXs,up to 8 monitors.
- TX support Loopout.
- RX support 2 HDMI outputs.
- HDMI IN/OUT/Loopout all support max 4K@30Hz resolution.
- Supports hot/cold shoe expansion
- Power supply: USB-C 5V/2A , NP-F(970/750/550) battery ,Power bank.
- Transmitter compatible: TV-BOX/Cameras/Laptop/Computer/Others HDMI devices.
- Receiver compatible : TV, monitor, projector and more.



SPECIFICATION

Transmission Range	656FT/200Meters
Frequency	2.4GHz/5GHz
Video Coding	H.265
Video/Audio Latency	≤0.1S
HDMI IN	3840x2160P@30Hz backward
HDMI OUT	3840x2160P@30Hz/1920x1080P@60Hz
LOOP-OUT	3840x2160P@30Hz/1920x1080P@60Hz
Power Supply Options	Type-C/DC 5V/2A/NP-F Battery
HDMI Protocol	HDMI 1.4b, HDCP 1.4
Code	60Mbps
Material	PC+ABS+Metal
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera

PACKING

Size(L×W×H)	120×69.8×29.8mm
Package Size	205x169x83mm
Package Weight	841g
Accessories	Transmitter x1 Receiver x1 Antenna x4 Charge Cable x2 Power Adapter x2 User Manual x1

TRANSMISSION RANGE WITH MULTI-RECEIVER

	WL097
1TX to 1RX	656FT/200Meters
1TX to 2RXs	330FT/100Meters
1TX to 3RXs	164FT/50Meters
1TX to 4RXs	65FT/20Meters

BATTERY SPEC

NPF970 6600Mah	TX: 24h	RX: 29h
NPF750 4400Mah	TX: 8h	RX: 12h
NPF550 2600Mah	TX: 5h	RX: 7h

CERTIFICATE



OUTDOOR
LIVE CHOICE





MA097Pro

4K Long Distance Transmission with Audio Headset Output

FEATURES

- Wireless distance: 1312FT/400Meters free barrier.
- Material: ABS+PC+Metal
- 2.4G/5G Dual-band Transmission.
- Low latency≤0.1S.
- Plug and play, no App.
- 1TX support max 4RXs,up to 8 monitors.
- 3.5 mm jack for audio separate transmission
- TX support Loopout.
- RX support 2 HDMI outputs.
- HDMI IN/OUT/Loopout all support max 4K@30Hz resolution.
- Supports hot/cold shoe expansion
- Power supply: USB-C 5V/2A , NP-F(970/750/550) battery ,Power bank.
- Transmitter compatible: TV-BOX/Cameras/Laptop/Computer/Others HDMI devices.
- Receiver compatible : TV, monitor, projector and more.



SPECIFICATION

Transmission Range	1312FT/400Meters
Frequency	2.4GHz/5GHz
Video Coding	H.265
Video/Audio Latency	≤0.1S
HDMI IN	3840x2160P@30Hz backward
HDMI OUT	3840x2160P@30Hz/1920x1080P@60Hz
LOOP-OUT	3840x2160P@30Hz/1920x1080P@60Hz
AUDIO OUT	3.5 mm jack
Power Supply Options	Type-C/DC 5V/2A/NP-F Battery
HDMI Protocol	HDMI 1.4b, HDCP 1.4
Code	60Mbps
Material	PC+ABS+Metal
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera

PACKING

Size(L×W×H)	120×69.8×29.8mm
Package Size	205x169x83mm
Package Weight	841g
Accessories	Transmitter x1 Receiver x1 Antenna x4 Charge Cable x2 Power Adapter x2 User Manual x1

TRANSMISSION RANGE WITH MULTI-RECEIVER

	WL097Pro
1TX to 1RX	1312FT/400Meters
1TX to 2RXs	656FT/200Meters
1TX to 3RXs	490FT/150Meters
1TX to 4RXs	390FT/120Meters

BATTERY SPEC

NPF970 6600Mah	TX: 24h	RX: 29h
NPF750 4400Mah	TX: 8h	RX: 12h
NPF550 2600Mah	TX: 5h	RX: 7h

CERTIFICATE



OUTDOOR
LIVE CHOICE





MA094

Long Range and Stable Transmission

FEATURES

- Point to point, LOS Range up to 330FT/100Meters
- Button switch,one-click to connect/disconnect
- Plug and play, no App
- Low latency≤0.05S
- 1080P@60Hz backward input/output
- Transmitter compatible: Smartphone/Ipad/Laptop camera etc.
- Receiver compatible :TV, monitor, projector and more.



SPECIFICATION

Frequency	5GHz
Transmission Range	330FT/100Meters
Video Coding	H.265
Video/Audio Latency	≤0.05S
HDMI IN	T920x1080P@60Hz
HDMI OUT	1920x1080P@60Hz
Power Supply Options	TYPE-C/DC 5V/1A
HDMI Protocol	HDMI 1.3
Code	20Mbps
Material	PC+ABS
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera

PACKING

Size(L×W×H)	95×29×12.7mm
Package Size	160x126x42mm
Package Weight	230g
Accessories	Transmitter x1 Receiver x1 Charge Cable x2 User Manual x1

CERTIFICATE





MA093

Smart and Stable for Business

FEATURES

- Built-in Antenna, LOS Range up to 60Meters /196FT
- Button switch,one-click to connect/disconnect
- Plug and play, no App
- Low latency≤0.05S
- Multi TXs to 1RX
- 1080P@60Hz backward input/output
- Transmitter compatible: Smartphone/Ipad/Laptop camera etc.
- Receiver compatible :TV, monitor, projector and more.



SPECIFICATION

Frequency	5GHz
Transmission Range	196FT/60Meters
Video Coding	H.265
Video/Audio Latency	≤0.05S
HDMI IN	3840x2160P@30Hz backward
HDMI OUT	1920x1080P@60Hz
Power Supply Options	TYPE-C/DC 5V/1A
HDMI Protocol	HDMI 1.4, HDCP 1.4
Code	20Mbps
Material	PC+ABS
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera

PACKING

Size(L×W×H)	95×29×12.7mm
Package Size	160x126x42mm
Package Weight	230g
Accessories	Transmitter x1 Receiver x1 Charge Cable x2 User Manual x1

CERTIFICATE



OFFICE





MA084

Smart and Stable for Business

FEATURES

- LOS Range up to WL084 656FT/200Meters,
- Button switch,one-click to connect/disconnect
- Plug and play, no App
- Low latency≤0.05S
- 1TX to 2RXs
- 1080P@60Hz backward input/output
- Transmitter compatible: Smartphone/Ipad/Laptop camera etc.
- Receiver compatible :TV, monitor, projector and more.



SPECIFICATION

Frequency	5GHz
Transmission Range	656FT/200Meters
Video Coding	H.265
Video/Audio Latency	≤0.05S
HDMI IN	1920x1080P@60Hz
HDMI OUT	1920x1080P@60Hz
Power Supply Options	TYPE-C/DC 5V/1A
HDMI Protocol	HDMI 1.3
Code	20Mbps
Material	PC+ABS
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera

PACKING

Size(L×W×H)	95×29×12.7mm
Package Size	160x126x42mm
Package Weight	230g
Accessories	Transmitter x1 Receiver x1 Charge Cable x2 User Manual x1

TRANSMISSION RANGE WITH MULTI-RECEIVER

1TX to 1RX	656FT/200Meters
1TX to 2RXs	260FT/80Meters

CERTIFICATE



OFFICE





MA090

Compact and Stable for Conference

FEATURES

- Built-in Antenna , LOS Range up to 590FT/180Meters
- 2.4G/5G Dual-band Transmission.
- Low latency≤0.06S.
- Plug and play, no App.
- Up to 1TX to 4RXs.
- 1080P@60Hz output resolution and backward compatible.
- Supports hot/cold shoe expansion (M3 hole)
- USB-C DC 5V/2A power supply or portable charge.
- Transmitter compatible :TV set-top box, laptop camera and other HDMI source devices.
- Receiver compatible : TV, monitor, projector and more.



SPECIFICATION

Frequency	2.4GHz/5GHz
Transmission Range	590FT/180Meters
Video Coding	H.264
Video/Audio Latency	≤0.06S
HDMI IN	1920x1080P@60Hz backward
HDMI OUT	1920x1080P@60Hz
Power Supply Options	TYPE-C/DC 5V/2A
HDMI Protocol	HDMI 1.3, HDCP 1.4
Code	20Mbps
Material	PC+ABS
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera

PACKING

Size(L×W×H)	87×45×15mm
Package Size	209x147x47mm
Package Weight	485g
Accessories	Transmitter x1 Receiver x1 Charge Cable x2 Power Adapter x2 HDMIExtension Cable x2 HDMIExtension Adapter x1 User Manua x1

TRANSMISSION RANGE WITH MULTI-RECEIVER

	WL090
1TX to 1RX	590FT/180Meters
1TX to 2RXs	525FT/160Meters
1TX to 3RXs	393FT/120Meters
1TX to 4RXs	328FT/100Meters

CERTIFICATE





MA080

1080P Long Distance for Wireless Transmission

FEATURES

- LOS transmission Range up to 1110FT/338Meters
- Low latency≤0.05S
- Plug and play
- Up to 1TX to 4RXs
- HDMI input/output at 1080P@60Hz backward
- Compatible with various HDMI devices
- Supports hot/cold shoe expansion
- DC/NP-F battery/USB-C power supply



SPECIFICATION

Frequency	2.4GHz/5GHz
Transmission Range	1110FT/338Meters
Video Coding	H.264
Video/Audio Latency	≤0.05S
HDMI IN	1920x1080P@60Hz backward
HDMI OUT	1920x1080P@60Hz
LOOP OUT	1920x1080P@60Hz
Power Supply Options	TYPE-C/DC 12V/ NP-F battery
HDMI Protocol	HDMI 1.3, HDCP 1.4
Code	20Mbps
Material	PC+ABS+Metal
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera

PACKING

Size(L×W×H)	108.5×69.7×27.2mm
Package Size	340x278x77mm
Package Weight	1550g
Accessories	Transmitter x1 Receiver x1 Antenna x4 Charge Cable x2 Power Adapter x2 Extension Bracket x1 Micro/ Mini/ HDMI Cable x3 User Manual x1

TRANSMISSION RANGE WITH MULTI-RECEIVER

1TX to 1RX	1110FT/338Meters
1TX to 2RXs	1050FT/320Meters
1TX to 3RXs	935FT/285Meters
1TX to 4RXs	787FT/240Meters

BATTERY SPEC

NPF970 6600Mah	TX: 17h	RX: 26h
NPF750 4400Mah	TX: 11h	RX: 16h
NPF550 2600Mah	TX: 7h	RX: 10h

CERTIFICATE

HDMI
HIGH DEFINITION MULTIMEDIA INTERFACE

FC

CE

SRRC

RoHS

CE IC





MA096

4K Transmission+USB3.0 Video Capture

FEATURES

- LOS transmission Range up to 720FT/220Meters
- Low latency≤0.1S
- Plug and play
- Up to 1TX to 4RXs
- HDMI input/output /loop out at 4K@30Hz backward
- USB3.0 output at max 1080P@60Hz for recording
- Support hot/cold shoe expansion (M3 and 1/4 nut hole)
- DC/NP-F battery/USB-C power supply
- Compatible with various HDMI devices



PROFESSIONAL

SPECIFICATION

Frequency	2.4GHz/5GHz
Transmission Range	720FT/220Meters
Video Coding	H.265
Video/Audio Latency	≤0.1S
HDMI IN	3840x2160P@30Hz backward
HDMI OUT	3840x2160P@30Hz/1920x1080P@60Hz
LOOP OUT	3840x2160P@30Hz/1920x1080P@60Hz
UVC OUT	1920x1080P@60Hz
Power Supply Options	TYPE-C/DC 12V/ NP-F battery
HDMI Protocol	HDMI 1.4b, HDCP 1.4
Code	60Mbps
Material	PC+ABS+Wood
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera

PACKING

Size(L×W×H)	108.5×69.7×27.2mm
Package Size	290x191x126mm
Package Weight	1850g
Accessories	Transmitter x1 Receiver x1 Antenna x4 Charge Cable x2 Power Adapter x2 Extension Bracker x1 Micro/Mini/HDMI Cable x3 User Manual x1 USB-C 3.0 Data Cable

TRANSMISSION RANGE WITH MULTI-RECEIVER

1TX to 1RX	720FT/220 Meters
1TX to 2RXs	330FT/100 Meters
1TX to 3RXs	164FT/50 Meters
1TX to 4RXs	65FT/20 Meters

BATTERY SPEC

NPF970 6600Mah	TX: 12h	RX: 13h
NPF750 4400Mah	TX: 9h	RX: 10h
NPF550 2600Mah	TX: 5h	RX: 5.5h

CERTIFICATE





MA098/MA098 Pro

SDI Professional-grade 4K Wireless Video Transmission

FEATURES

- LOS transmission Range up to WL098 656FT/200Meters, WL098Pro 1000FT/305Meters
- Low latency≤0.1S
- Plug and play
- AMS audio monitor
- 1TX support 4RXs,up to 8 monitors.
- HDMI input/output /loop out support 4K@30Hz.
- SDI input/output support 1080P@60Hz
- Through a wall transmission up to 230FT/70 meters
- DC/NP-F battery/USB-C power supply
- Supports hot/cold shoe expansion
- Compatible with various HDMI and SDI devices



PROFESSIONAL

SPECIFICATION

Frequency	2.4GHz/5GHz
Transmission Range	656FT/200Meters 1000FT/305Meters
Video Coding	H.265(+IC Hard Decode)
Video/Audio Latency	≤0.1S
HDMI IN	3840x2160P@30Hz backward
HDMI OUT	3840x2160P@30Hz/1920x1080P@60Hz
LOOP OUT	3840x2160P@30Hz/1920x1080P@60Hz
SDI IN/OUT	1920x1080P@60Hz
Power Supply Options	TYPE-C/DC 12V/ NP-F battery
HDMI Protocol	HDMI 1.4b, HDCP 1.4
Code	60Mbps
Material	PC+ABS+Metal
Compatibility	PC/Laptop/PS4/5/TVBOX/Camera

PACKING

Size(L×W×H)	115×65×31mm
Package Size	288x192x78mm
Package Weight	1550g
Accessories	Transmitter x1 Receiver x1 Antenna x4 Charge Cable x2 Power Adapter x2 Mini /Micro/HDMI Cable 25cmx3 Extension Bracket x1 User Manual x1


TRANSMISSION RANGE WITH MULTI-RECEIVER

	WL098	WL098Pro
1TX to 1RX	656FT/200 Meters	1110FT/338Meters
1TX to 2RXs	330FT/100 Meters	1050FT/320Meters
1TX to 3RXs	164FT/50 Meters	935FT/285Meters
1TX to 4RXs	65FT/20 Meters	787FT/240Meters

BATTERY SPEC

NPF970 6600Mah	TX: 10h	RX: 11h
NPF750 4400Mah	TX: 6h	RX: 6h
NPF550 2600Mah	TX: 4h	RX: 4h

CERTIFICATE





MA050

Selfie display screen for Mobile phone rear camera

FEATURES

- 1. Multi-Scenario Compatibility
 - Smartphone Mirroring: Syncs with your phone's screen for rear-camera shooting, live streaming, and teleprompter use.
 - BT Shooting: Control your phone's rear camera remotely for focus, wide-angle adjustments, and beauty effects.
- 2. Flexible Controls
 - 180° flip and mirror mode switching.
 - Adjustable display ratios (default: aspect ratio mode) and full-screen zoom.
- 3. Wireless Convenience
 - High-speed 5.8GHz WiFi with a 100-meter range (in open areas).
- 4. Long-Lasting Battery , Fast Charge
 - Built-in 1500mAh battery provides up to 3 hours of continuous use. Supports charging while in operation.



EXTENDED PRODUCT

SPECIFICATION

Screen Size	3.97 inches
Resolution	480×800 pixels (RGB)
Brightness	300 cd/m² (wide-viewing angle)
Battery Capacity	3.7V 1500mAh
Charging Power	5V/2A
Battery Life	Up to 3 hours
Wireless Connection	5.8GHz WiFi
BT	Supported
WiFi Range	330FT/100 meters (interference-free)
BT Range	65FT/20 meters

FUNCTIONS

Mirroring
Wireless take photo+ Recording
Wireless transmission up to 330FT/100M





MA100

4K Live Video Switcher for Multi Cameras

FEATURES

- 4 CH HDMI input
- 1 CH HDMI output
- USB3.0 capture video complying with UVC for live streaming to multi media platform
- HDMI IN/OUT at max 4K@30Hz
- PIP (Picture in Picture)
- MIC/LINE IN, Audio Mixing /Monitor
- PVW/PGM signal source real-time switch
- Multi PVW switch to single PVW for monitoring
- 4x USB power supply port out 5V/1.5A
- Plug and play, One-click BAR/STILL



SPECIFICATION

Video Input	4xHDMI A
Video Output	1xHDMI A
Audio Input	2x3.5mm MIC In + 1x3.5mm Line In
Audio Output	1x3.5mm Audio Output
Power In	1xDC 12V/3A
Power Out	4xUSB-A 5V/1.5A
Max Power	36W
Satndards	HDMI 1.4; USB3.0
HDMI IN	3840x2160P@30Hz backward
HDMI OUT	1080P@60Hz / 4K@30Hz
UVC OUT	1080P@60Hz / 1080P@30Hz
Video Format	MP4/AVIMPEG/DiVX/MOVIASF/WMV RMVB/QuickTime
Audio Format	AAC/ FLAC/ APE/AMR/ OggVorbis/ VQF/RealAudio/WMA/MIDI/MPEG-4/ MP3/MPEG/ AIFF/ WAVE/ CD
Size	300x127x30mm
Weight	693g
Package List	Video Switcher x1 Power Adapter x1 Type C Cable3.0 x1 Manual x1 Quick Guide x1

CERTIFICATE



EXTENDED
PRODUCT



MA201

Expandable Battery Bracket

SPECIFICATION

Power Input	DC 6V-8.4V
Power Output	5V-Max3A
Power Interface	Type-C
Material	Aluminum Alloy
Color	Black
Battery Type	F550/F750/F970/FM50/FM500H or Equivalent battery
Size	88x45x27.5mm
Weight	108g



MA203

High-gain Mushroom-head Antenna

FEATURES

- Easy to install
- Mini size & light weight
- PC+ABS Material
- Removability
- Costomed RP-SMA Male connector, compatible with wireless HDMI transmitter and receiver. Polarization is RHCP.



SCREW

SPECIFICATION

Size	1/4 screw
Material	Metal
Use	Fix cameras with Transmitter



BATTERY

SPECIFICATION

Battery Model	NP-F970
Battery capacity	7800mAh



BATTERY CHARGER

SPECIFICATION

Specification	Dual charge for NP-F970 battery
Use	Charge for NP-F970 battery



